

East Street Bike Network Connection

Project Timeline

Winter 2019/2020 – Design

Spring 2020 – Construction

Project Partners

BikePGH

Healthy Ride

Project Funding

Design – In-house

Construction - \$100,000

Funding Source


Design – Operating

Construction – Capital


Questions?

Email

bikeped@pittsburghpa.gov

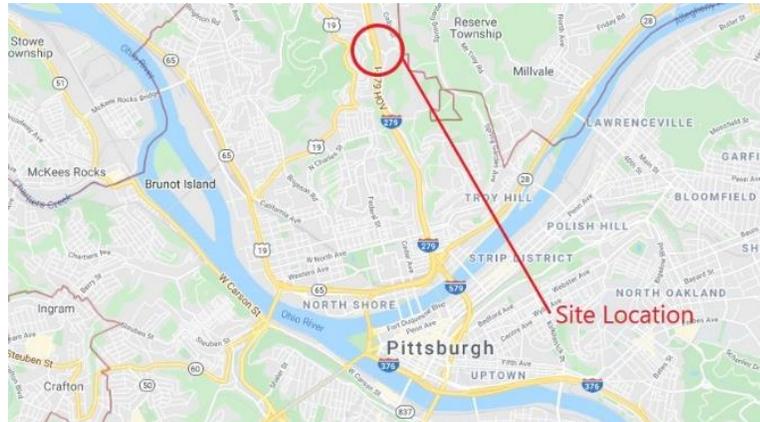

Project Location, East St in Perry North

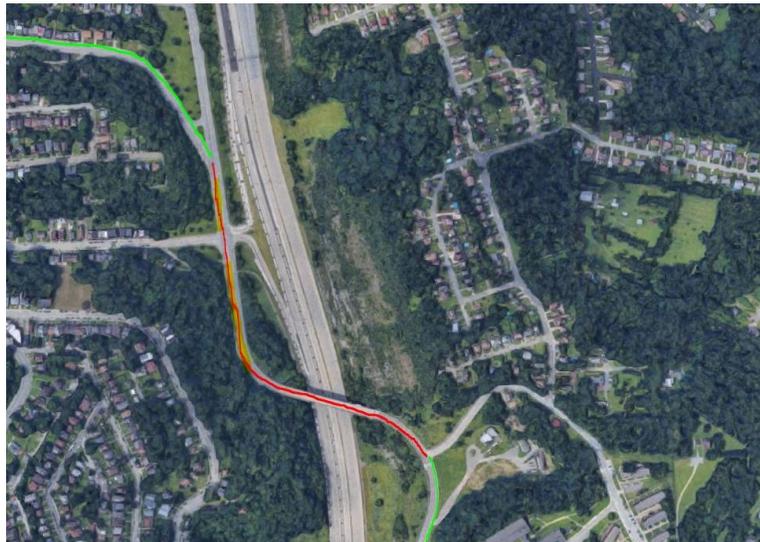

Project Limits In red with approx. traffic island locations highlighted

Perry North, Summerhill, Northview Heights (Council District 1) –

The East Street Bike Network Connection project will eliminate a notable gap between the East Street bike lanes along I-279 (installed in 2016) and the East Street climbing lane to Perry North (installed in 2020). The project will include removing the existing 900 linear feet of concrete median and repaving the street. The restriping will maintain one general travel lane in each direction, existing turn lanes, and new directional bike lanes.

East Street Bike Network Connections




LEFT: End of existing bike lane on East St at South project limit (Mt. Pleasant Road)



RIGHT: East St traffic island between 279N and Venture St

East Street Bridge Proposed

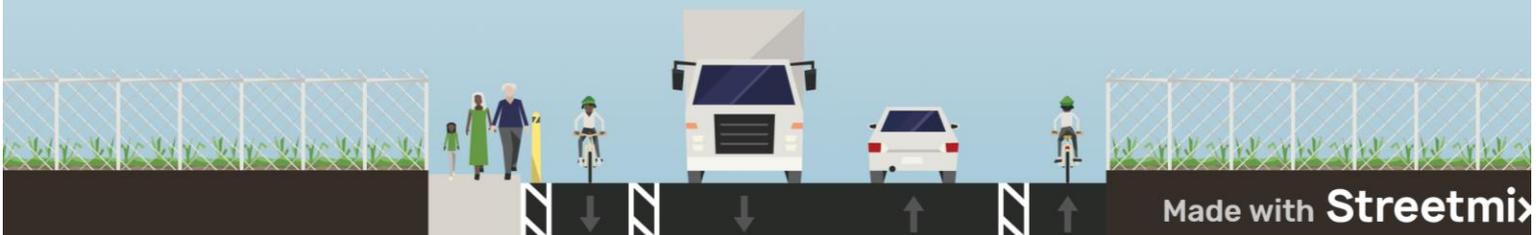

Proposed lane configuration of East St over 279-N